



IY65 | IY80 | IY105 | IY135

# Softmount Washer-Extractor

## FEATURES

- Stainless steel top, drum and tub and front panel, black side panel
- Patented soap hopper
- Easy access to all vital parts from the front
- Large door opening for easy loading & unloading
- Smart Drum : Extra mechanical action thanks to the cascading shape of the surface
- Smart Wave: Optimized water and detergent consumption

## OPTIONS

- Coin operated
- Stainless steel side panels
- Liquid soap connection and pumps
- Water recovery kit
- Steam heating version
- 3rd water inlet

## CONTROLS OPTIONS

- Evolis / Evolis Elite – fully programmable and customizable cycles 7" touch screen.
- User-friendly screen with operating instructions built in as part of the control
- Complete control content available in 34 languages
- Aries / Aries Elite – fully programmable control with 20 Pre-set programs and memory up to 99.
- Aries Micro – Programmable control with 6 programs (+2 cycle modifiers and Imbalance detection)



### TOUCH CONTROL AVAILABLE

Multilingual user-friendly 7" touch control



### 500G EXTRACTION SPEED

Less moisture for a more efficient drying process




### CLOUD-BASED PLATFORM

to easily monitor your laundry everywhere and at any time

		IY65	IY80	IY105	IY135
<b>INNERDRUM</b>					
Capacity 1:09	kg (lb)	7 (15)	8,5 (19)	12 (26)	15 (33)
Capacity 1:10	kg (lb)	6,5 (14)	7,5 (17)	10,5 (23)	13,5 (30)
Volume	litres	65	75	105	135
Diameter	mm	530	530	620	620
<b>DRUM SPEED</b>					
Wash	rpm	49	49	49	49
Extraction	rpm	1298	1298	1200	1151
G-FACTOR		500	500	500	460
<b>HEATING</b>					
Electricity	kW	3 - 7	3 - 7	3 - 7	3 - 9
Steam	bar	1 - 8	1 - 8	1 - 8	1 - 8
Hot water	°C	90	90	90	90
Sound pressure level	dB (A)	< 65	< 65	< 65	< 65
Water valves connection	BSP	3/4"	3/4"	3/4"	3/4"
Water pressure	kPa	100-600	100-600	100-600	100-600
Rec. water pressure	kPa	300-500	300-500	300-500	300-500
Water inlet	l/min	20	20	20	20
Drain valve	outer Ø mm	76	76	76	76
Flow amount with drain valve	l/min	210	210	210	210
Steam valve connection	BSP	1/2"	1/2"	1/2"	1/2"
Steam pressure	kPa	100-800	100-800	100-800	100-800
<b>DIMENSIONS</b>					
Size H*W*D	mm	1135×710×740	1135×710×790	1245×795×795	1245×795×945
Net weight	kg	170	185	210	255
<b>TRANSPORT DATA</b>					
Packed H*W*D	mm	1245×750×840	1245×750×840	1345×835×840	1345×835×985
Gross weight	kg	180	200	235	275

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	S	T	U	V	W	X	Y
<b>IY65</b>	612	564	710	24	349	1135	180	48	740	676	1030	1030	940	480	88	230	203	67	1030	42	293	390	218	113
<b>IY80</b>	612	564	710	24	349	1135	180	48	790	726	1030	1030	940	480	88	230	203	67	1030	42	293	390	218	113
<b>IY105</b>	648	600	795	24	342	1245	180	48	795	726	1140	1140	1050	506	88	230	203	67	1140	42	293	475	218	113
<b>IY135</b>	648	600	795	24	342	1245	180	48	945	876	1140	1140	1050	506	88	230	203	67	1140	42	293	475	218	113
	W			H				D																

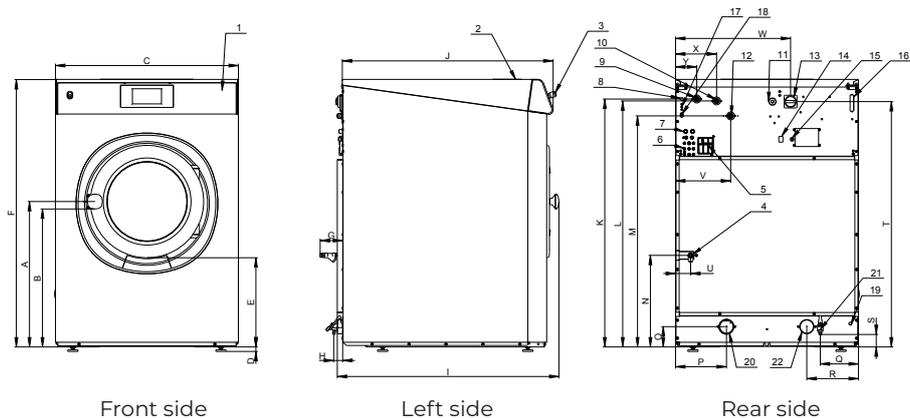

- |                                     |  |  |
|-------------------------------------|--|--|
| 1. Control panel                    | 9. Cold water inlet, soft                  | 16. Fuses  |
| 2. Soap dispenser                   | 10. Cold water inlet, hard                 | 17. USB port - optional  |
| 3. Central stop button              | 11. Electrical connection                  | 18. PC programming connection  |
| 4. Steam connection                 | 12. Hot water inlet                        | 19. Discharge water cable inlet  |
| 5. Air relieve                      | 13. Main switch                            | 20. Drain valve - 3 in. [76 mm]  |
| 6. Liquid soap connection           | 14. Heating change-over switch             | 21. Water Sample - 1/2 in. (Applicable for wash bath sample-on request only) |
| 7. Recycle water inlet              | 15. Liquid soap pump electrical connection |  |
| 8. Recycled water valve cable inlet |  |  |