

# INDUSTRIAL CYLINDER HEATED DRYING IRONERS

I  
RANGE

IR 50      IF 50

500MM      500MM



COMPACT  
DESIGN



EASY  
OPERATION



OPTIMIZED  
OUTPUT

senso.speed

EASYFOLD

## FEATURES


- Large surface contact with linen over an angle of 3000
- Finger protection and emergency button for more safety
- Durable Meta Aramid ironing belts
- Automatic cooldown
- Easy to operate microprocessor: 20 pre-set ironing programmes
- Indication of ironing speed and temperature
- Reverse mode possible
- IR model: front and rear output troughs
- IF model: front output table

- Variable setups for folding (IF)
- IF model: integrated length folder model
- Frequency-controlled motors
- Easy to remove lint filters
- Standard anti-static bar (IF)
- Easyfold® system requires less maintenance (no ribbons and rolls)
- Electric, gas or steam heating

## OPTIONS

- Foot pedal for easy stop and start operation
- Rear output table (IF)
- Chrome-plated cylinder for a better thermal conduction

TYPE		IF/IR50-200	IF/IR50-250	IF/IR50-320
ROLLER DIAMETER	mm	500	500	500
USEFUL ROLLER LENGTH	mm	2000	2600	3200
<b>HEATING</b>				
Electric heating	kW	38	55	65
Gas heating	kW	36	52	66
Steam heating	kg/h	49	68	88
<b>MOTORS</b>				
Roller motor	kW	0,37	0,37	0,37
Fan motor	kW	0,18/0,255	2x0,18/0,255	2x0,18/0,255
<b>IRONING CAPACITY*</b>				
Electrical & Gas heating	kg/h	80	95	120
Steam heating	kg/h	95	115	145
ROLLER SPEED	m/min.	1,5-8	1,5-8	1,5-8
<b>ELECTRIC CONNECTION</b>				
380-415V 3AC+N 50/60 Hz, 208-240V 3AC 50/60 Hz 380-415V 3AC-N 50/60 Hz, 440V-480 3AC 60 Hz				
<b>DIMENSIONS</b>				
H×W×D	mm	1568x2750x1185	1568x3350x1185	1568x3950x1185
Net weight	kg	1290	1440	1680
<b>TRANSPORT DATA</b>				
Volume (packed)	m <sup>3</sup>	7,14	8,62	10,13
Packed H×W×D	mm	1900x2890x1300	1900x3490x1300	1900x4100x1300
Gross weight	kg	1520	1700	2000

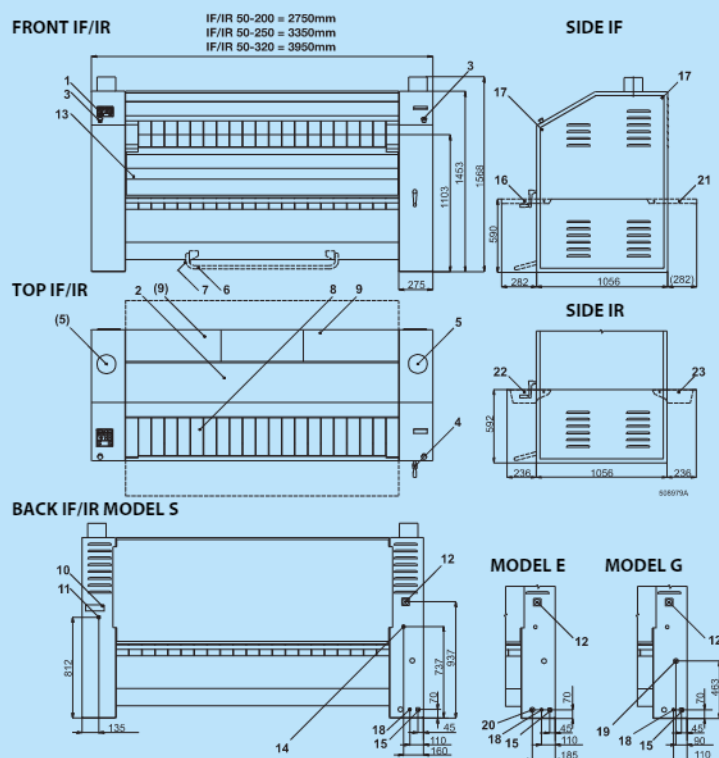

1. Control panel
2. Upper cover
3. Centralstop
4. Manual drive of roller
5. Exhaust ventilation
6. Pedal used for starting/stopping belts movement (according to order, only for version OPL)
7. Pedal microswitch (according to order, only for version OPL)
8. Feeding belts/feeding table
9. Cover of filter sieve
10. Name plate
11. Condense drain G 3/4" (only for version "S")
12. Main switch
13. Upper trough
14. Steam supply G 3/4" (only for version "S")
15. External protective connector
16. Output tilting table - front
17. Bolts of side cover
18. Main supply of electric power
19. Gas supply G 3/4" (only for version "G")
20. Power supply for heating system (only for version "E")
21. Output tilting table - rear (according to order)
22. Output tilting trough - front
23. Output tilting trough - rear